

Documentation

HiPath 8000

OpenStage 60/80

Quick Reference Guide




Communication for the open minded

Siemens Enterprise Communications
www.siemens.com/open


SIEMENS

Using Your Telephone

Function Keys and Audio Keys

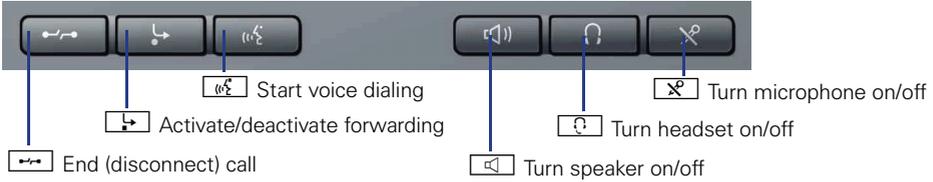

Mode keys and TouchSlider

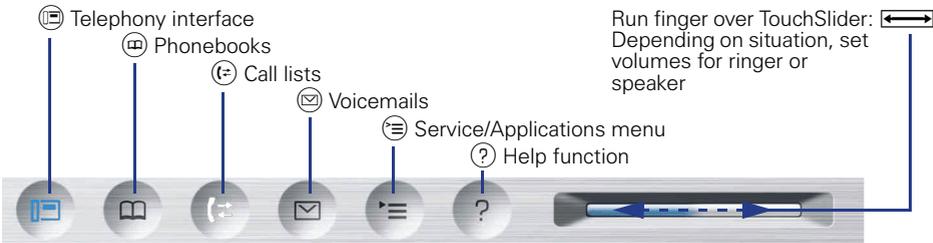

Shining blue: mode is active


Shining white:
for call lists: new entry in call list
for voicemails: new voicemail

Touch guide

Press ▲ key:
- Scroll upwards
Hold down:
- Scroll to beginning of list

Press ↶ key:
- Cancel function
- Delete character left of cursor
- Go up a level

Press ▼ key:
- Scroll downwards
Hold down:
- Scroll to end of list

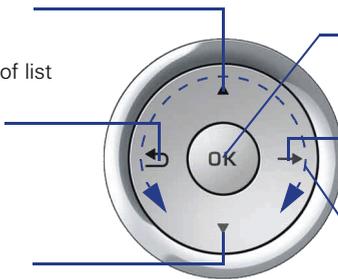

Press OK key:
- Confirm input
- Perform action

Press ↷ key:
- Call up the context menu
- Go down a level


Run finger over inner edge of ring Ⓞ:
- Scroll through lists and menus
- Adjust volume

Programmable sensor keys on the display



Display

Components

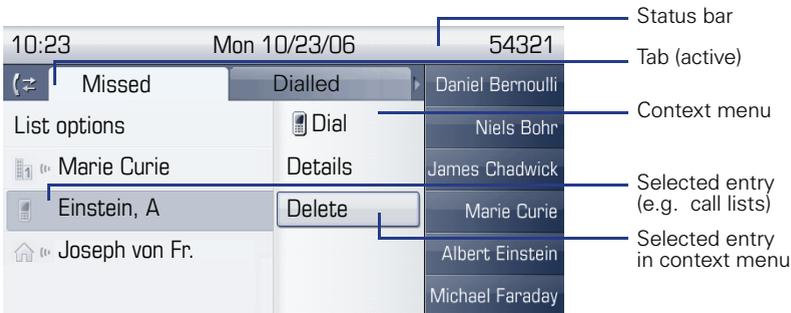

Entering Phone Numbers and Text

Keypad


In situations where text entry is possible, you can use the dial keys to enter text, punctuation and special characters. To do this, press the numerical keys repeatedly.

Extra asterisk and pound key functions:

Key	Function during text input	Function when held down
	Write special characters	Deactivate the ring tone.
	Switch between upper/lower case and digit entry.	Activate telephone lock.

Display keyboard

Depending on the context, the display keyboard is displayed with different elements.

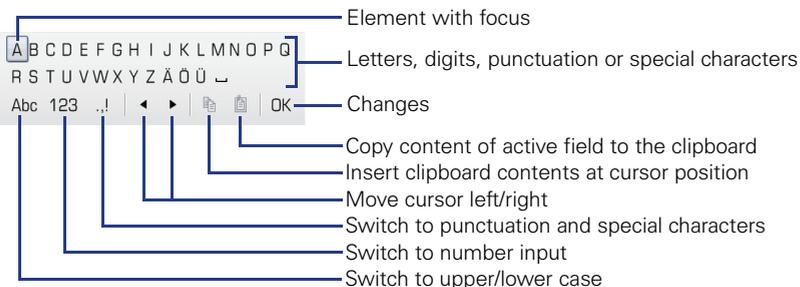

Using the display keyboard:

- Shift focus to other element
- Shift focus to "OK"
- Select element

Important Operating Procedures

 Lift handset	 Enter text or number
 Replace handset	 Select entry
 Conduct call	 Open context menu
 Ring tone/call waiting tone	 Next step in procedure

In Idle State

Answering a call with the handset



Answering a call in speakerphone mode



Rejecting a call



Deflecting a call



Dialing from the caller list

 ("Missed" tab, press repeatedly for "Dialled", "Received", "Forwarded")

  desired entry 

Activating callback

 destination phone number   if no answer or busy:  "Call back" 

Saving a phone number to a key

 Hold down programmable key   "Normal" or "Shifted"   "Selected dialling" 

  "Label"   Enter name, e.g. Peter   "Setting" 

  destination phone number   "Save & Exit"   

Dialing a saved number

 saved phone number  

Saving a function to a key

- Hold down programmable key \triangleright \blacktriangleleft "Normal" or "Shifted" OK
- \triangleright \blacktriangleleft select function OK (for functions with phone number: \triangleright \blacktriangleleft "Setting" OK)
- \triangleright 1234 enter the phone number) \triangleright \blacktriangleleft "Save & Exit" OK \triangleright END

Redialing a number

- OK \triangleright \blacktriangleleft "Redial" \triangleright OK \triangleright hook

Programming call forwarding

- hook \triangleright \blacktriangleleft "Edit call forwarding" OK \triangleright \blacktriangleleft "Destination" (e. g. under "All calls") OK
- \triangleright "Edit favourites" OK \triangleright \blacktriangleleft "Destination 1" OK \triangleright 1234 phone number OK
- \triangleright \blacktriangleleft "Option: Save & Exit" OK \triangleright \blacktriangleleft "All calls" OK \triangleright \blacktriangleleft "On" OK \triangleright \blacktriangleleft "Save & Exit" OK \triangleright END

Turning call forwarding on/off for all calls

- hook

During Calls with a Party A

Switching to speakerphone mode

Hold down  ▷  (US only:  ▷ )

Consultation

→ ▷ "Consultation"  ▷  phone number for party B  ▷  party B ▷ →
▷  ▷  party A

Accepting call waiting

 call waiting tone ▷  "Accept"  ▷  party B ▷  party B ▷ →
▷   "Disconnect & return"  ▷  party A

Deflect call on call waiting

 Call waiting tone ▷  "Deflect"  ▷  phone number for party B  ▷  party A

Start conference

→ ▷ "Consultation"  ▷  phone number for party B  ▷  party B ▷ →
▷   "Conference"  ▷  party A and B

Start conference on call waiting

 Call waiting tone ▷  "Accept"  ▷  party B ▷ → ▷  "Conference" 
▷  party A and B

Blind transfer to party B

→ ▷  "Consultation"  ▷  destination phone number  ▷ 

Transfer after consultation

→ ▷  "Consultation"  ▷  phone number for party B  ▷  party B ▷ 

Reference No.:
A31003-S2000-U111-1-7619

Communication for the open minded

Siemens Enterprise Communications
www.siemens.com/open

© **Siemens Enterprise
Communications GmbH & Co. KG**
Hofmannstr. 51,
D-81359 München

The information provided in this document contains merely general descriptions or characteristics of performance which in case of actual use do not always apply as described or which may change as a result of further development of the products. An obligation to provide the respective characteristics shall only exist if expressly agreed in the terms of contract. Subject to availability. Right of modification reserved. The trademarks used are owned by Siemens Enterprise Communications GmbH & Co. KG or their respective owners.